

Extreme Temperature Pressure Sensor



Features

- ➔ All Stainless steel
- ➔ Miniature pressure sensor
- ➔ Optional remote electronic
- ➔ Operating from -20 to +250°C

Applications

- ➔ Oil & gas
- ➔ Aerospace
- ➔ Military
- ➔ Test benches

Operating up to 250°C, PET160 is a ruggedized pressure sensor dedicated to extreme temperature. With all stainless steel wetted parts, It is compatible with most media, including corrosive fluids used in automotive and aerospace industries. Equipped with the latest thin film technology developed by EFE, its performances and stability over wide temperature range are excellent. Models are available with unamplified and voltage outputs, thanks to a remote electronic module, packaged in a miniature stainless steel housing, fitted in the cable and operating up to 125°C.

Technical specifications


Pressure ranges (FS)	20bar ; 40bar ; 100bar ; 250bar ; 400bar ; 600bar ; 300PSI ; 500PSI ; 1500PSI ; 3000PSI ; 10000PSI ; 5000PSI
Type	Gage
Safe overload	150% FS
Burst pressure	300% FS
Power supply	8 to 16Vdc
Consumption	< 10mA
Insulation	> 1000 MOhms under 50Vdc at ambient temperature
Output at 0%FS	0.5Vdc
Output at 100%FS	4.5Vdc
Zero and sensitivity settings tolerances	±50mV
Amplifier type	Remote electronic, operating from -40 to +125°C, with 1m of cable at each side (standard)
Non linearity and hysteresis combined	±0.25% FS Option : ±0.1% FS
Non repeatability	±0.02% FS typ.

Technical Specifications


Signal bandwidth	1000Hz @ -3dB Option : Special Adjustment up to 3000Hz @ -3dB
Compensated temperature range	+20 to +250°C
Operating temperature range	-20 to +250°C
Combined thermal zero & sensitivity shifts	±0.03% FS/°C
Constant acceleration in linear vibrations	± 0.02% FS/g (frequency 20-2000Hz, 50g max.)
Mechanical shock	100g ½ sinus 1ms
Electrical protection	Protected against polarity inversion
EMC protection	Compliant to EN61000
Electrical connection	AWG26 Shielded Teflon Cable Ø3.4mm ±0.2, 5 wires
Mechanical connection	M10x1-4h male Option : 3/8-24 UNF-3A male
Material(s) of wetted parts	Stainless Steel 316L ; Stainless Steel 17-4PH ; Stainless steel 15-5PH
Weight	< 40g without cable
Enclosure protection	IP65 for absolute & sealed gage version

Codification

Extreme Temperature Pressure Sensor	PET16	7	S	40bar	G	02	09/1m	H	1	3	B	
Output Signal												
0.5-4.5Vdc unregulated power supply		7										
Material												
Stainless Steels			S									
Range												
Example				40bar								
Type												
Gage					G							
Mechanical connection												
M10x1-4h male						02						
3/8-24 UNF-3A male						11						
Electrical connection												
AWG26 Shielded Teflon Cable Ø3.4mm ±0.2, 5 wires							09/1m					
Compensated temperature range												
+20 to +250°C								H				
Non linearity and hysteresis combined												
±0.25% FS									1			
±0.1% FS									2			
Combined thermal zero & sensitivity shifts												
±0.03% FS/°C										3		
Options												
Special Adjustment up to 3000Hz @ -3dB											B	

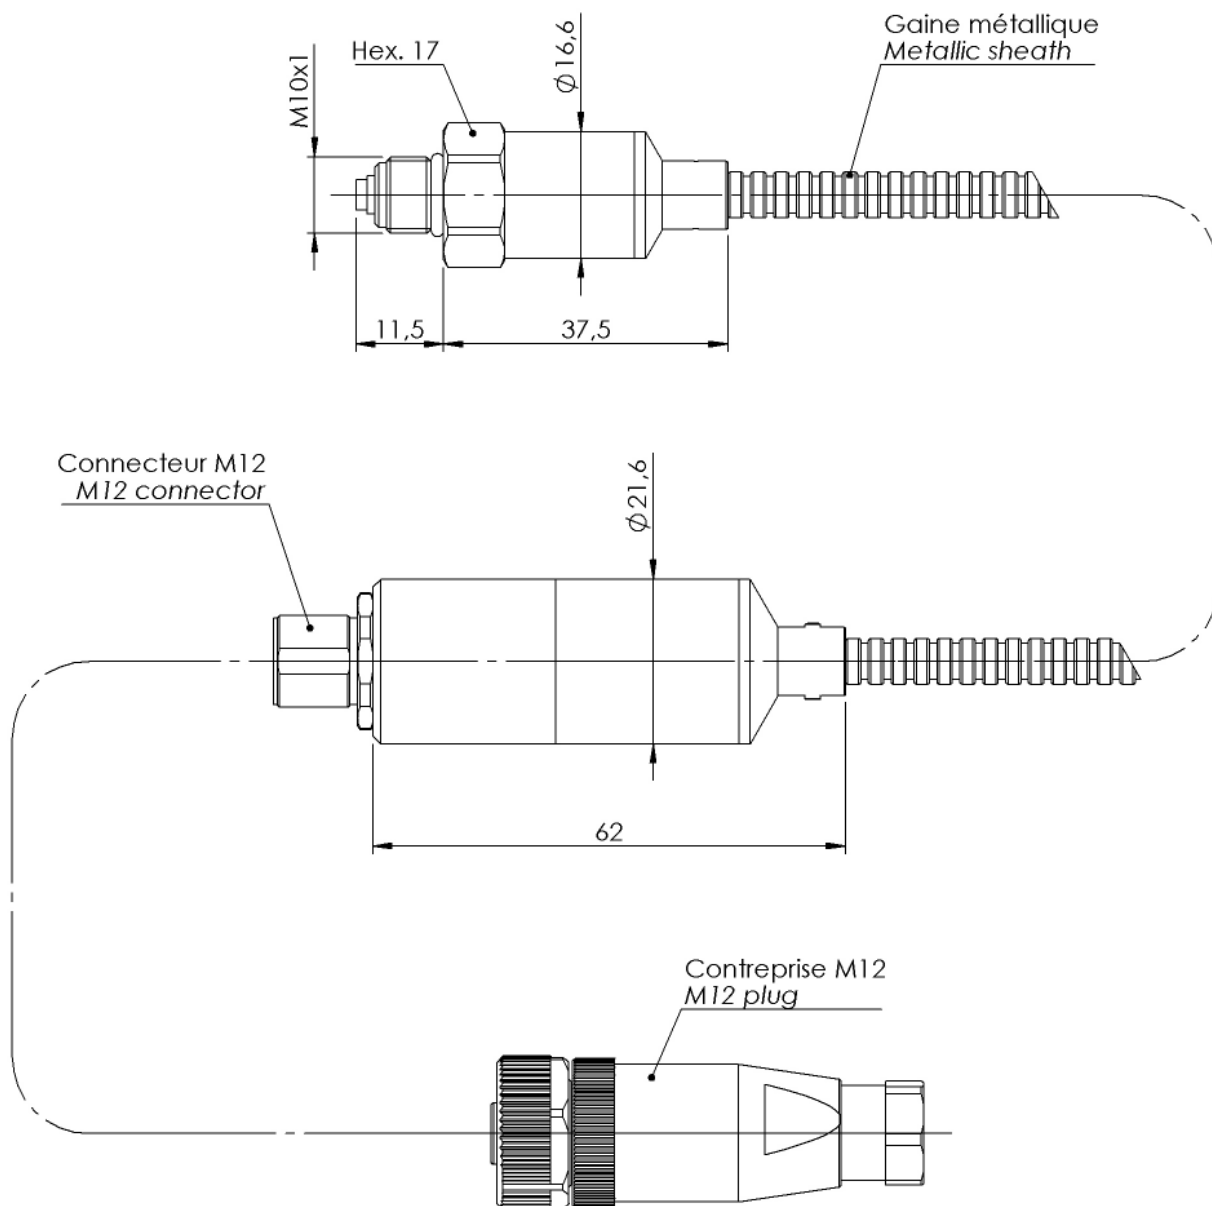

Dimensions : mm

	5 CONDUCTOR TEFLON CABLE		
	VOLTAGE OUTPUT	CONDUCTOR	
	+ EXCITATION	RED	
	+ SIGNAL	GREEN	
	0 VOLT	BLACK	
	NC	WHITE	
	NC	BLUE	
	SENSOR HOUSING	SHIELD	

Agent :



E.F.E.

L'ESSOR FRANCAIS ELECTRONIQUE

16 Rue Porte a Bateaux - 27540 Ivry-la-Bataille - FRANCE

Tel : 33 (0)2 32 22 35 05 - Fax : 33 (0)2 32 36 93 08

www.efc-sensor.com - infos@efc-sensor.com